

FELTRATRICE PER TESSUTI ACRILICI.



Costruita interamente in acc. Inox AISI 304 nelle versioni a tre e quattro scompartimenti diametro 2500x1000, particolarmente indicata per la vaporizzazione, l'invecchiamento e il trattamento di tessuti acrilici a pelo, fioccati, scamosciati, accoppiati, finte pelli, ecc. E' composta come segue :

pannellatura esterna isolata a pannelli con sportelli di carico e scarico nonché pannelli per raffreddamento, cesto ruotante a scompartimenti, motorizzazione cesto, serpentine vaporizzatrici, batterie di riscaldamento, ventilatore ricircolo aria, esaustore, quadro di comando, programmatore, marcatura CE.

FELTING MACHINE FOR ACRYLIC FABRICS.

This machine is entirely made of stainless steel AISI 304. It is constructed in version with three and four sections with a diameter equal to 2500x1000. It is particularly suitable for steaming, ageing and treating pile acrylic, woolly, suede and lapped fabrics along with imitation leathers. The felting machine is composed of the following component part :

external insulated paneling whose panels are fitted with loading and unloading doors, cooling panels, revolving basket divided in section, basket drive, steam coils, heating batteries, air fan, exhauster, control panel, programmer, EC mark.

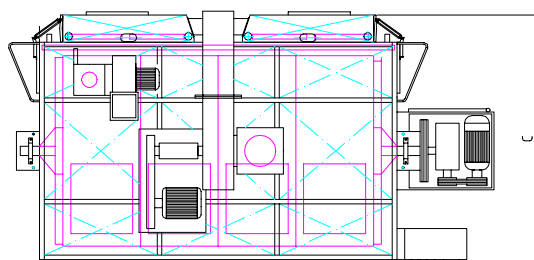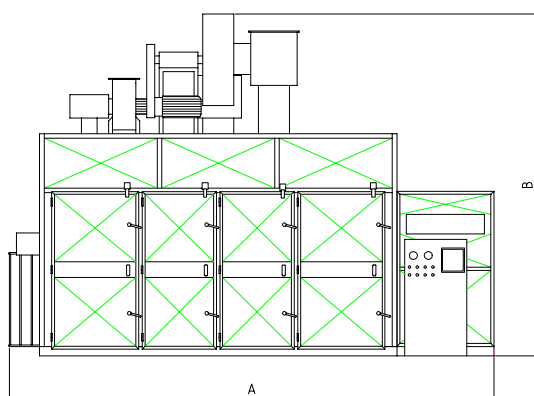

TIPO	1 Scomp.	2 Scomp	3 Scomp	4 Scomp
A	3300	4300	5300	6300
B	4400	4400	4400	4400
C	3200	3200	3200	3200
Capacità	80 mt.	160 mt.	240 mt.	320 mt.